

INSTALLATION, USE, AND MAINTENANCE MANUAL

CARGOBLOCK® ND

Cargo Area Door Protection for Commercial Vehicles

EAN Code 8056814560577

Product Code 0001070001602

Application:

Mercedes Citan
Renault Kangoo fino al 2021
Nissan NV250
Dacia Dokker fino al 2020





Mercedes Citan



Renault Kangoo fino al 2021





Dacia Dokker fino al 2020



Nissan NV250



A - PREMISE

Objective of the Manual

This manual aims to provide detailed guidelines and essential information for the correct installation of the *CargoBlocK ND* anti-theft system on the vehicle. It is recommended to follow all the procedures outlined meticulously, as they are crucial to ensuring a quick and optimal installation.

Warning

Before proceeding with the installation, it is essential to verify that the rear and side doors are properly aligned and that the images in this manual match those of the vehicle on which the system is to be installed. *ST Automotive* disclaims any responsibility for damages to the vehicle resulting from incorrect installation or failure to follow the instructions.

B - GENERAL INSTRUCTIONS

Installation of CargoBlock ND

The installation of *CargoBlock ND* has been rigorously tested on vehicles following the assembly instructions outlined in the attached manual.

Warranty Registration

To activate the product warranty, it is mandatory to register on the website: https://web.starblock.it/garanzia-prodotto/



C - TECHNICAL CHARACTERISTICS

CargoBlock ND represents an innovative protection for the cargo area doors of commercial vehicles, designed for installation without drilling or structural modifications. Made with pre-formed and pre-drilled stainless steel plates, it ensures maximum reliability.

Thanks to its advanced design and cutting-edge technology, *CargoBlock ND* is practical and easy to install. It comes with dedicated mounting plates for each vehicle model, allowing installation on the original lock mounting points, without the need for additional holes or modifications.

CargoBlock ND is equipped with the proprietary StarBlock® lock, which incorporates advanced technology and a non-duplicable key profile.




D - CONTENUTO DELLA CONFEZIONE

- 1 Welcome kit
- 2 Set of reflective stickers for rear and side doors
- 2 Window decals
- 2 Keys + 1 emergency key
- 2 Keychains



Accessories:








1 M8x25 Stud

Equipment required for installation:





1 - Left side rear door plate

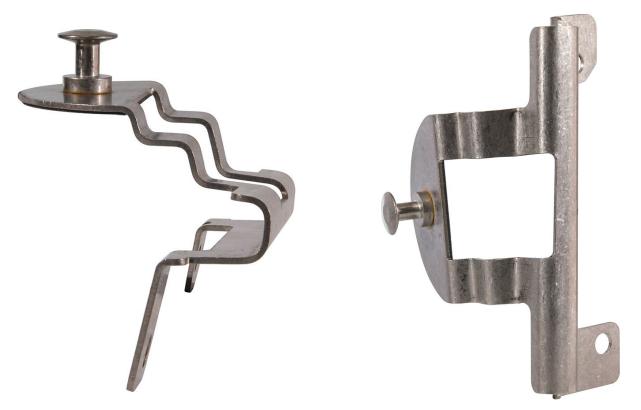

2 - Right side rear door mounting plate





3 - Sliding side door plate





4 - Side door pillar plate






Remove the Torx screw that fixes the lock on the left side rear door.




Screw in the supplied stud to prevent the lock from detaching. Then, unscrew the two Torx screws at the bottom that secure the lock.



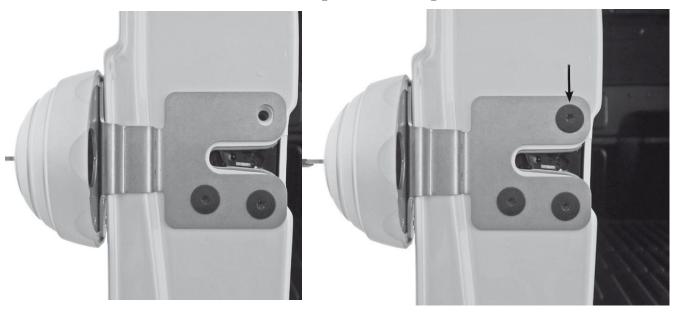

Position the plate in line with the lock mounting holes and secure it with the supplied Torx pins, avoiding fully tightening them to allow for final adjustment. Then, unscrew the stud and re-screw the other Torx screw of the lock.



Unscrew the Torx screws that secure the door hook plate.





Position the mounting plate on the door, aligning it with the mounting holes of the hook plate; ensure that during the plate fastening process, the gasket does not get compressed between the edges of the door and the plate.



Secure the plate with the Torx pins that were previously unscrewed, avoiding tightening them fully to allow for the final adjustment.





Bring the two doors together and check that the plates are aligned. Once the alignment is verified, proceed with tightening all the screws.





Completed installation of the CargoBlock ND on the rear door of the vehicle.





Remove the Torx screw at the top that secures the side door lock




Screw in the supplied stud to prevent the lock from detaching during installation. Then, unscrew and remove the other two Torx screws.






Position the plate in line with the lock mounting holes and secure it with the two original Torx pins, avoiding tightening them fully for the final adjustment. Unscrew the stud and screw in the original supplied Torx screw. Finally, tighten all the pins.

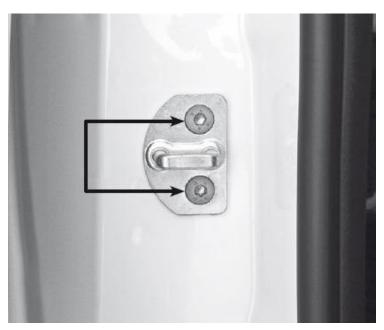

Unscrew the Torx screws that secure the hook.



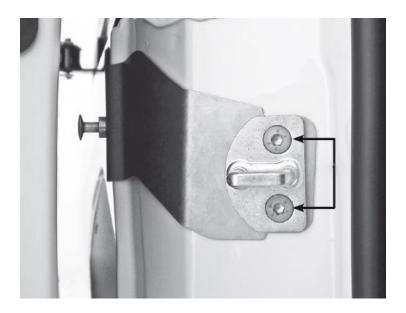

Position the supplied plate in line with the hook mounting holes and simultaneously place the hook onto the plate. Secure them with the original pins, avoiding tightening them fully to allow for the final adjustment of the plate and hook.



Bring the two doors together and check that the plates are aligned. Once the correct alignment is verified, proceed with tightening all the Torx screws.





Completed installation of the *CargoBlock ND* on the side door of the vehicle.



F – USE AND MAINTENANCE

HOW TO USE CARGOBLOCK

- Opening CargoBlock ND: Insert the key into the lock of the rear or side doors. Either side of insertion is fine.
 Turn the key 90° clockwise. In this position, the key cannot be removed from the lock.
- 2. **Closing CargoBlock:** Close the vehicle doors completely.

Turn the key counterclockwise.

Then, remove the key from the lock.

MAINTENANCE OF CARGOBLOCK

- 1. **Periodic Cleaning:** Remove any dust buildup from the product and the lock.
 - Apply a dry lubricant spray to the lock and mechanism.
- 2. **Maintenance Frequency:** It is recommended to perform maintenance every six months.
 - Perform maintenance more frequently if used in particularly dusty, sandy, or dirty environments.
- 3. **Additional Protection:** If the vehicle is used on muddy roads, it is recommended to use the anti-mud device to protect the lock.













ST Automotive Srl Ss 96 Km 119 70026 Modugno (BA) T.+39 080 2143503 info@starblock.it



Rev.6 June 27 - 0001070001602 EAN 8056814560577 Citan, Kangoo fino a 2021, Nissan NV250, Dacia Dokker fino a 2020



starblock, it