

## INSTALLATION, USE, AND MAINTENANCE MANUAL

# CARGOBLOCK<sub>®</sub> ND

#### Protection of Cargo Compartment Doors for Commercial Vehicles

EAN Code: **8056814560652** Product Code: **0001070002402** 

Application:

**MAXUS eDeliver 9** 







#### Maxus eDeliver 9



### **A - INTRODUCTION**

Objective of the Manual

This manual aims to provide detailed guidelines and essential information for the proper installation of the CargoBlocK ND anti-theft system on the vehicle. It is recommended to strictly follow all the procedures outlined, which are essential for ensuring a quick and optimal installation.

#### Warning

Before proceeding with the installation, it is crucial to verify that the rear and side doors are properly aligned and that the images provided in this manual match those of the vehicle on which the system is to be installed. ST Automotive disclaims any responsibility for damages to the vehicle resulting from incorrect installation or failure to follow the instructions.

#### **B - GENERAL INSTRUCTIONS**

Installation of CargoBlock ND

The installation of CargoBlock ND has been rigorously tested on vehicles following the assembly instructions outlined in the attached manual.

**Product Warranty Registration** 

To activate the product warranty, it is mandatory to register on the website: <u>https://web.starblock.it/garanzia-prodotto/</u>



## **C - TECHNICAL CHARACTERISTICS**

CargoBlock ND represents the innovative protection for the cargo compartment doors of commercial vehicles, designed for installation without the need for drilling or structural modifications. Made with pre-formed and pre-drilled stainless steel plates, it ensures maximum reliability.

Thanks to its advanced design and cutting-edge technology, CargoBlock ND is practical and simple to install. It comes with dedicated mounting plates for each vehicle model, allowing installation on the original locking points without the need for additional drilling or modifications.

CargoBlock ND is equipped with the proprietary StarBlock® lock, which incorporates advanced technology and a non-duplicable key profile.



## **D – CONTENTS OF THE PACKAGE**

- 1. Welcome kit
- 2. Set of reflective stickers for rear and side doors
- 3. 2 Window decals
- 4. 2 Keys + 1 emergency key
- 5. 2 Keychains



#### Accessories:



1 M6x25 Pin

#### Equipment required for installation







40 Torx key





#### 1 - Rear door plate, left side



2 - Piastra porta posteriore lato destro





#### 3 - Side sliding door plate




#### 4 - Side door mounting plate





Remove the Torx screw that secures the lock.

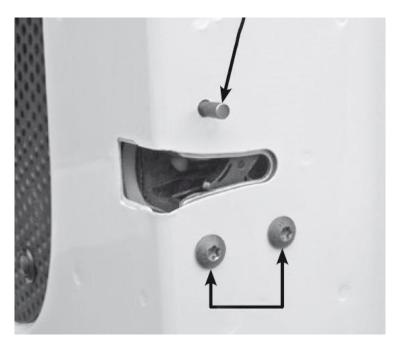

Screw in the provided pin to prevent the lock from detaching; then unscrew the two Torx screws that secure the lock.






Position the plate (as shown in the image) in alignment with the lock fastening holes.




Secure the plate with the two provided Torx pins. Remove the pin and screw in the provided Torx pin, avoiding fully tightening the Torx pins to allow for the final adjustment of the plate.



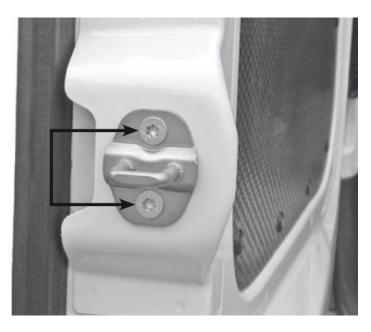


Unscrew the two Torx screws that secure the hook.

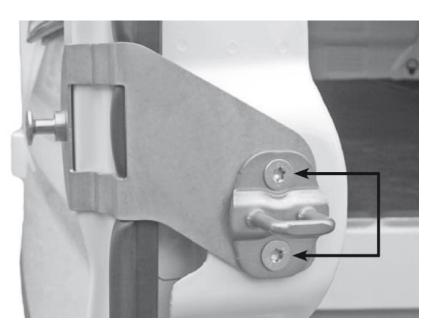


Position the provided plate in alignment with the fastening holes of the hook plate. Place the hook onto the plate and secure them with the original Torx pins, avoiding tightening them to allow for the final adjustment.



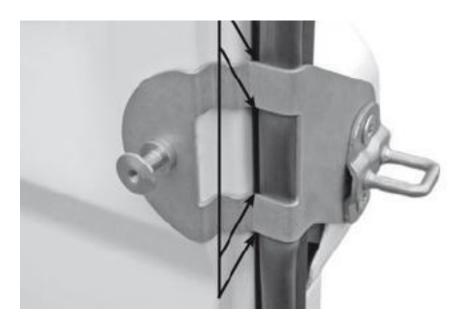

Make sure that during the plate fastening process, the gasket is not compressed between the edges of the door and the plate.

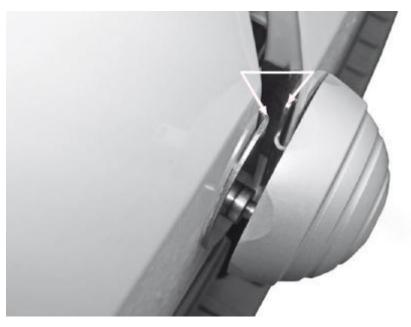

Bring the two doors close together and verify that the plates are aligned. Once the correct alignment is confirmed, proceed with tightening all the screws.





Completed installation of CargoBlock ND on the rear door of the Maxus eD9 vehicle.





Remove the Torx screw that secures the lock.



Screw in the provided pin to prevent the lock from detaching; then unscrew the two Torx screws that secure the lock.






Position the side door plate in alignment with the lock fastening holes.




Secure the plate with the two provided Torx screws. Remove the pin and screw in the provided Torx screw, making sure not to fully tighten all three screws to allow for the final adjustment.



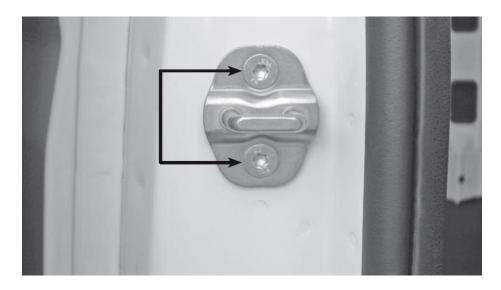

Unscrew the two Torx screws that secure the hook.

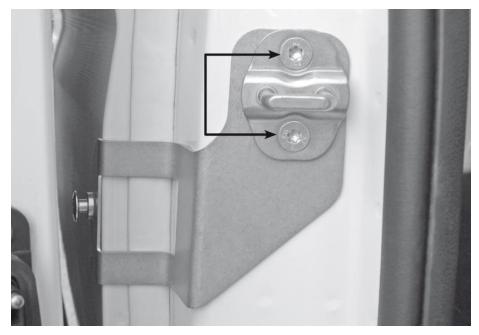

Place the provided plate in alignment with the hook fastening holes, while simultaneously positioning the hook onto the plate. Secure them with the original screws, but do not tighten them completely to allow for final adjustment of the plate and hook.





Bring the two doors close together and verify that the plates are aligned. Once the correct alignment is confirmed, proceed with tightening all the Torx screws.





Complete installation of **CargoBlock ND** on the side door of the Maxus eD9 vehicle.



### F – USE AND MAINTENANCE

### HOW TO USE CARGOBLOCK

- Opening CargoBlock ND: Insert the key into the lock of the rear or side doors. Either side of insertion is suitable. Rotate the key 90° clockwise. In this position, the key cannot be removed from the lock.
- Closing CargoBlock: Ensure the vehicle doors are properly closed. Rotate the key counterclockwise. Then, remove the key from the lock.

#### CARGOBLOCK MAINTENANCE

- Periodic Cleaning: Remove any dust buildup from the product and the lock. Apply a dry lubricant spray to the lock and mechanism.
- Maintenance Frequency: It is recommended to perform maintenance every six months. Perform maintenance more frequently if used in particularly dusty, sandy, or dirty environments.
- 3. Additional Protection: If the vehicle is used on muddy roads, it is advised to use an anti-mud device to protect the lock.







**ST Automotive Srl** Ss 96 Km 119 70026 Modugno (BA) T.+39 080 2143503 info@starblock.it





Rev.6 June 27 - 0001070002402 EAN 8056814560652 Maxus eDeliver 9

starblock.it